

KSU CET

S1 & S2 Notes

2019 Scheme



OSCILLATION AND WAVESHARMONIC OSCILLATION - DIFFERENTIAL EQUATION AND ITS SOLUTION

$$F = Ma$$

$$= M \frac{d^2x}{dt^2} \quad \text{--- (1)}$$

$$F = -kx \quad \text{--- (2)}$$


$$M \frac{d^2x}{dt^2} = -kx$$

÷ by M


$$\frac{d^2x}{dt^2} = -\frac{kx}{M}$$

$$\frac{d^2x}{dt^2} + \frac{k}{M}x = 0$$

$$\frac{d^2x}{dt^2} + \omega_0^2 x = 0$$



This is the differential equation for harmonic motion.



$v = \frac{\text{displacement}}{\text{time}}$

$$= \frac{dx}{dt}$$

$a = \frac{\text{velocity}}{\text{time}}$

$$\frac{dv}{dt} = \frac{d}{dt} \left(\frac{dx}{dt} \right)$$

$$= \frac{d^2x}{dt^2}$$

$$\omega_0 = \sqrt{\frac{k}{M}}$$

$$\omega_0^2 = \frac{k}{M}$$

$$\frac{d^2x}{dt^2} + \omega_0^2 x = 0 \quad \text{--- (3)} \quad \frac{dx}{dt} = v$$

$$\frac{d^2x}{dt^2} = -\omega_0^2 x$$

$$\frac{dv}{dt} = -\omega_0^2 x$$

$$\frac{dv}{dx} \cdot \frac{dx}{dt} = -\omega_0^2 x$$

$$\frac{dv}{dx} \cdot v = -\omega_0^2 x$$

$$v \cdot dv = -\omega_0^2 x \cdot dx$$

Integrating both sides.

$$\int v \cdot dv = \int -\omega_0^2 x \cdot dx$$

$$\frac{v^2}{2} = -\omega_0^2 \frac{x^2}{2} + C \quad \text{--- (4)}$$

$x = a$ (amplitude).

at extreme position $v = 0$.

ie, $x = a, v = 0$.

$$\frac{0^2}{2} = -\omega_0^2 \frac{a^2}{2} + C$$

$$\omega_0^2 \frac{a^2}{2} = C$$

$$(4) \Rightarrow \frac{v^2}{2} = -\omega_0^2 \frac{x^2}{2} + \frac{\omega_0^2 a^2}{2}$$

$$\frac{v^2}{2} = \frac{\omega_0^2}{2} (a^2 - x^2)$$

$$v^2 = \omega_0^2 a^2 - \omega_0^2 x^2$$

$$= \omega_0^2 (a^2 - x^2)$$

$$v = \sqrt{\omega_0^2 (a^2 - x^2)}$$

$$v = \pm \omega_0 \sqrt{a^2 - x^2} \quad \text{--- (5)}$$

$$(5) \Rightarrow \frac{dx}{dt} = \omega_0 \sqrt{a^2 - x^2}$$

$$\frac{dx}{\sqrt{a^2 - x^2}} = \omega_0 \cdot dt$$

$$\int \frac{dx}{\sqrt{a^2 - x^2}} = \int \omega_0 \cdot dt$$

$$\sin^{-1} \frac{x}{a} = \omega_0 t + \phi$$

$$\frac{x}{a} = \sin(\omega_0 t + \phi)$$

$$x = \underline{\underline{a \sin(\omega_0 t + \phi)}}$$

Solution of differential equation of simple harmonic motion.

{ PHYSICAL SIGNIFICANCE OF ω_0 } \Rightarrow

When $t \rightarrow (t + \frac{2\pi}{\omega_0})$

$$x = a \sin(\omega_0 (t + \frac{2\pi}{\omega_0}) + \phi)$$

$$= a \sin(\omega_0 t + 2\pi + \phi)$$

$$v = \frac{\text{displacement}}{\text{time}}$$

$$t = \frac{\text{dis}}{v}$$

$$= \frac{2\pi}{\omega_0} \text{ (For a circle)}$$

$$v = \frac{1}{T} = \frac{1}{\frac{2\pi}{\omega_0}} = \frac{\omega_0}{2\pi}$$

$$\Rightarrow \underline{\underline{\omega_0 = 2\pi v}}$$

Maximum displacement, $x_{\max} = A$ because $\sin(\omega_0 t + \phi)$

DAMPED HARMONIC OSCILLATOR

restoring force \rightarrow dissipative force

The decrease in amplitude of an oscillator by dissipative force is called damping.

$$M \frac{d^2x}{dt^2} = -kx - r \frac{dx}{dt} \quad (1) \quad r = \text{damping coefficient.}$$

$$M \frac{d^2x}{dt^2} + kx + r \frac{dx}{dt} = 0$$

\div by M

$$\frac{d^2x}{dt^2} + \frac{k}{M}x + \frac{r}{M} \frac{dx}{dt} = 0.$$

$$\frac{r}{2M} = C, \text{ damping constant}$$

$$\frac{r}{M} = 2C$$

$$\frac{d^2x}{dt^2} + \omega_0^2 x + 2C \frac{dx}{dt} = 0.$$

$$\frac{d^2x}{dt^2} + 2C \frac{dx}{dt} + \omega_0^2 x = 0. \quad (2)$$

Differential equation of damped harmonic motion.

Solution \Rightarrow

$$\text{Let } x = Ae^{qt}$$

$$\frac{dx}{dt} = \frac{d}{dt} Ae^{qt}$$

$$= A \frac{d}{dt} e^{qt} = A \frac{d}{dt} x e^{qt}$$

$$= \underline{\underline{Ax e^{qt}}}$$

$$\frac{d^2x}{dt^2} = \frac{d}{dt} Ax e^{\alpha t}$$

$$= Ax e^{\alpha t} \frac{d}{dt} \alpha t$$

$$= \underline{\underline{A\alpha^2 e^{\alpha t}}}$$

KSU
GRECI

$$(2) \Rightarrow A\alpha^2 e^{\alpha t} + 2C A\alpha e^{\alpha t} + \omega_0^2 A e^{\alpha t} = 0$$

$$A e^{\alpha t} (\alpha^2 + 2C\alpha + \omega_0^2) = 0 \quad \text{--- (3)}$$

ASSUME $\alpha^2 + 2C\alpha + \omega_0^2 = 0$.

$$a=1, b=2C, c=\omega_0^2$$

$$\alpha = \frac{-b \pm \sqrt{b^2 - 4ac}}{2a}$$

$$= \frac{-2C \pm \sqrt{(2C)^2 - 4 \times 1 \times \omega_0^2}}{2 \times 1}$$

$$= \frac{-2C \pm \sqrt{4C^2 - 4\omega_0^2}}{2}$$

$$= \frac{-2C \pm \sqrt{4(C^2 - \omega_0^2)}}{2}$$

$$= \frac{-2C \pm 2\sqrt{C^2 - \omega_0^2}}{2}$$

$$= \left\{ \frac{-C \pm \sqrt{C^2 - \omega_0^2}}{1} \right\}$$

$$= -C \pm \sqrt{C^2 - \omega_0^2}$$

$$\alpha_1 = -C + \sqrt{C^2 - \omega_0^2}$$

$$\alpha_2 = -C - \sqrt{C^2 - \omega_0^2}$$

$\therefore \alpha = \alpha_1 + \alpha_2$ (it happens in second order differential equation)

Now,

x - displacement

$$x = Ae^{\alpha t} = A_1 e^{\alpha_1 t} + A_2 e^{\alpha_2 t} \quad \text{--- (4)}$$

$$= A_1 e^{(-c + \sqrt{c^2 - 4m_0^2})t} + A_2 e^{(-c - \sqrt{c^2 - 4m_0^2})t} \quad \text{--- (5)}$$

$$x = A_1 e^{-ct} e^{\sqrt{c^2 - 4m_0^2}t} + A_2 e^{-ct} e^{-\sqrt{c^2 - 4m_0^2}t}$$

$$= e^{-ct} \left\{ A_1 e^{\sqrt{c^2 - 4m_0^2}t} + A_2 e^{-\sqrt{c^2 - 4m_0^2}t} \right\} \quad \text{--- (6)}$$

$A_1, A_2 \rightarrow$ constant

damped harmonic

oscillation depends

on c and m .

$c > 2m_0 \Rightarrow$ over damped case.

$c = 2m_0 \Rightarrow$ critically damped case.

$c < 2m_0 \Rightarrow$ under damped case.

In overdamped case


$\sqrt{c^2 - 4m_0^2}$ is +ve

$c > 2m_0$

$$\therefore \sqrt{c^2 - 4m_0^2} = \beta$$

$$(6) \Rightarrow x = e^{-ct} \left\{ A_1 e^{\beta t} + A_2 e^{-\beta t} \right\}$$

$$= A_1 e^{(-c+\beta)t} + A_2 e^{(-c-\beta)t}$$

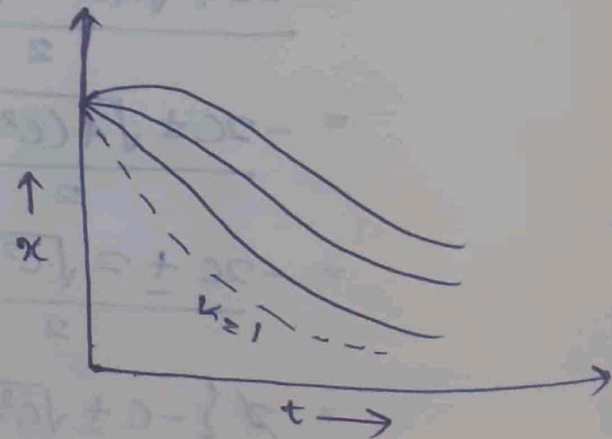

Here the RHS decreases exponentially with time without change in direction. This motion is known as non-oscillatory. (Dead beat / aperiodic).

eg: Dead beat galvanometer

In critically damped case

$$c = \omega_0$$

$$(6) \Rightarrow x = A_1 e^{-ct} + A_2 e^{-kt}$$

$$\text{here } c^2 - \omega_0^2 = 0$$

$$\text{ie, } x = (A_1 + A_2) e^{-kt}$$

A_1 and A_2 are constant, so constant + constant = constant.

$$\therefore A_1 + A_2 = B$$

$$x = B e^{-ct}$$

We use,

$$\sqrt{c^2 - \omega_0^2} = h, \text{ but } h \rightarrow 0.$$

$$x = A_1 e^{(-c + \sqrt{c^2 - \omega_0^2})t} + A_2 e^{(-c - \sqrt{c^2 - \omega_0^2})t}$$

$$= A_1 e^{(-c+h)t} + A_2 e^{(-c-h)t}$$

$$= e^{-ct} (A_1 e^{ht} + A_2 e^{-ht})$$

$$= e^{-ct} \{ A_1 (1+ht) + A_2 (1-ht) \}$$


$$= e^{-ct} (A_1 + A_1 ht + A_2 - A_2 ht)$$

$$= e^{-ct} \{ (A_1 + A_2) + ht (A_1 - A_2) \}$$


$$= e^{-ct} \{ D + (A_1 - A_2) Et \}$$

Initially displacement increases due to $(D + Et)$.

then finally reaches to zero.

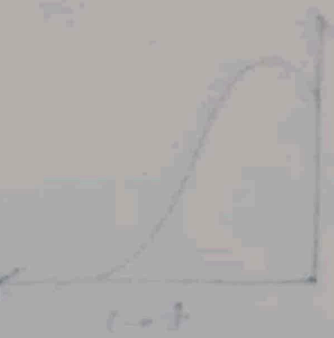

KSU
GECI

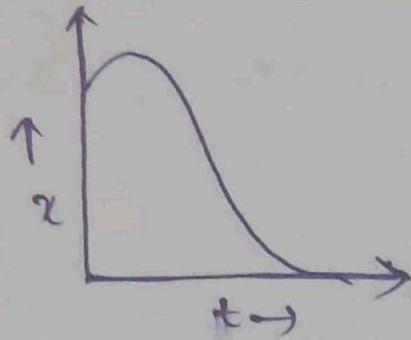

In under damped case

$$c < \omega_0,$$

$$\sqrt{c^2 - \omega_0^2} = \sqrt{-(\omega_0^2 - c^2)} = i\omega$$

$$ie, \omega_0^2 - c^2 = \omega^2$$

$$\sqrt{-1} = i$$

$$e^{i\omega t} = \cos \omega t + i \sin \omega t$$

$$e^{-i\omega t} = \cos \omega t - i \sin \omega t$$

$$(a) \Rightarrow x = e^{-ct} \left[A_1 e^{i\omega t} + A_2 e^{-i\omega t} \right]$$

$$= e^{-ct} \left[A_1 (\cos \omega t + i \sin \omega t) + A_2 (\cos \omega t - i \sin \omega t) \right]$$

$$= e^{-ct} \left(A_1 \cos \omega t + A_1 i \sin \omega t + A_2 \cos \omega t - A_2 i \sin \omega t \right)$$

$$= e^{-ct} \left((A_1 + A_2) \cos \omega t + (A_1 - A_2) i \sin \omega t \right)$$

let,

$$A_1 + A_2 = a_0 \sin \phi$$

$$i(A_1 - A_2) = a_0 \cos \phi$$


then,

$$x = e^{-ct} \left(a_0 \sin \phi \cos \omega t + \sin \omega t a_0 \cos \phi \right)$$

$$= e^{-ct} a_0 \left(\sin \phi \cos \omega t + \sin \omega t \cos \phi \right)$$

$$= e^{-ct} a_0 \sin(\omega t + \phi)$$

similar to simple harmonic oscillator

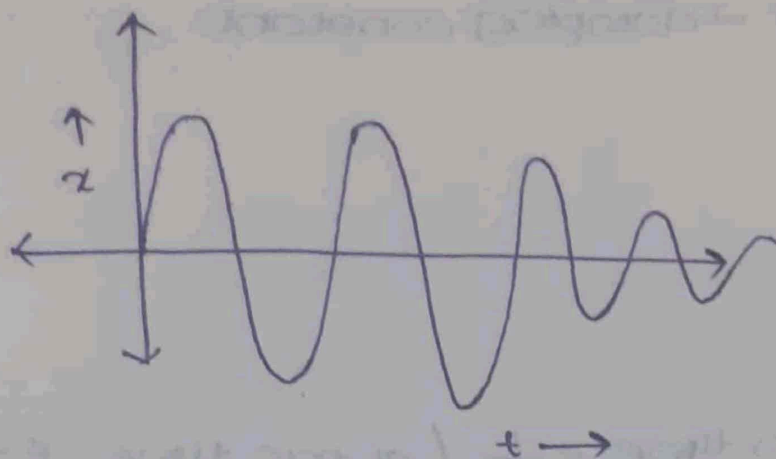

frequency ↓ time ↑

KSU
CIECI

(*) The Amplitude of oscillation decreases exponentially with time

(*) Angular frequency of oscillation decreases and period of oscillation increases.

$$\omega = \sqrt{\omega_0^2 - c^2}, \quad \omega < \omega_0$$

$$T = \frac{2\pi}{\omega}$$

$$= \frac{2\pi}{\sqrt{\omega_0^2 - c^2}} > \frac{2\pi}{\omega_0}$$

ENERGY OF DAMPED HARMONIC OSCILLATOR

Energy of damped harmonic oscillator is directly proportional to square of Amplitude.

We use,

$$a_0 e^{-ct} = a$$

$$E \propto a^2$$

$$E \propto (a_0 e^{-ct})^2$$

$$E \propto a_0^2 e^{-2ct}$$

$$E = E_0 e^{-2ct}$$


E_0 = Initial energy of damped harmonic oscillator.
at $t = 0$

When $t = \frac{1}{2c}$, $c \rightarrow$ damping constant

$$E = E_0 e^{-2c \times \frac{1}{2c}}$$

$$= E_0 e^{-1}$$

$$E = \frac{E_0}{e}$$

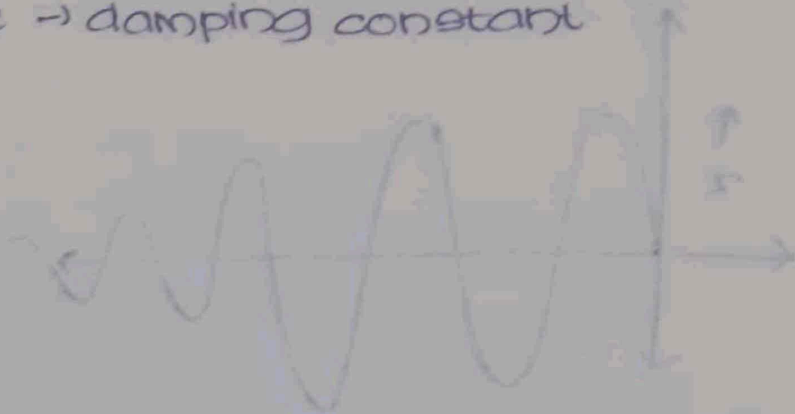

$\therefore T$, relaxation time $= \frac{1}{2c}$ (at this time $E = \frac{1}{e}$ of E_0)

QUALITY FACTOR OF DAMPED HARMONIC OSCILLATOR

$$Q = 2\pi \frac{\text{Energy stored}}{\text{Energy lost per period}}$$

$$E_t = E_0 e^{-2ct}$$

$$E_{t+T} = E_0 e^{-2c(t+T)}$$

$$= E_0 e^{-2ct} e^{-2cT}$$

$$= E_t e^{-2cT}$$

$$= \underline{E_t e^{-2cT}}$$

$$\Delta E_T = E_t - E_{t+T}$$

$$= E_t - E_t e^{-2cT}$$

$$= E_t (1 - e^{-2cT})$$

$$= E_t (1 - (1 - 2cT))$$

$$= E_t (1 - 1 + 2cT)$$

$$= E_t 2cT$$

$$\therefore Q = \frac{2\pi E\epsilon}{E\epsilon\tau}$$

KSU
CIECI

$$Q = \frac{2\pi E\epsilon}{E\epsilon\tau}$$

$$= \frac{2\pi}{\tau} \times \frac{1}{2C}$$

$$Q = \omega_0 \tau$$

$$\frac{2\pi}{\tau} = \omega_0$$

$$\frac{1}{2C} = \tau, \text{ relaxation time.}$$

$$\omega_0 = \sqrt{\frac{k}{M}}, \tau = \frac{1}{2C}$$

$$= \frac{1}{2 \times \frac{r}{2M}} = \frac{M}{r}$$

$$Q = \sqrt{\frac{k}{M}} \times \frac{M}{r}$$

$$= \sqrt{\frac{kM^2}{M}} \times \frac{1}{r}$$

$$= \frac{\sqrt{kM}}{r}$$

PRACTICAL CASE OF DAMPING

- (i) Guitar
- (ii) Automobile suspension.

FOR LCR CIRCUIT, FREQUENCY OF OSCILLATION :-

$$\omega = \frac{1}{2L} \sqrt{\frac{1}{LC} - \frac{R^2}{4L^2}}$$

$$Q = \frac{L\omega}{R}$$

FORCED OR DRIVEN HARMONIC OSCILLATOR

Restoring force, R.F = $-cx$.

Damping force, D.F = $-r \frac{dx}{dt}$.

Driven = $F_0 \sin pt$.

$$m \frac{d^2x}{dt^2} = -cx - r \frac{dx}{dt} + F_0 \sin pt$$

$$m \frac{d^2x}{dt^2} + r \frac{dx}{dt} + cx = F_0 \sin pt$$

divide by m ,

$$\frac{d^2x}{dt^2} + \frac{r}{m} \frac{dx}{dt} + \frac{c}{m} x = \frac{F_0}{m} \sin pt.$$

$$\Rightarrow \frac{d^2x}{dt^2} + 2k \frac{dx}{dt} + \omega_0^2 x = f_0 \sin pt \quad \left(\frac{F_0}{m} = f_0 \right) \quad \left[\frac{r}{2m} = k \right]$$

This is a linear differential equation of second order and its solution contains 2 parts.

(i) complementary function

it is a solution of $\frac{d^2x}{dt^2} + 2k \frac{dx}{dt} + \omega_0^2 x = 0$.

\Rightarrow solution,

$$x = a_0 e^{-kt} \sin(\omega t + \phi)$$

where $\omega = \sqrt{\omega_0^2 - k^2}$

(ii)

$$x = A \sin(\omega t - \theta) \text{ --- (a)}$$

$$\frac{dx}{dt} = A \cos(\omega t - \theta) \frac{d(\omega t - \theta)}{dt}$$

$$= \omega A \cos(\omega t - \theta) \text{ --- (c)}$$

$$\frac{d^2x}{dt^2} = \omega A - \sin(\omega t - \theta) \frac{d}{dt}(\omega t - \theta)$$

$$= -\omega^2 A \sin(\omega t - \theta) \text{ --- (b)}$$

KSCU

GRECI

(c), (a) and (b) --- (1)

$$-\omega^2 A \sin(\omega t - \theta) + 2K \omega A \cos(\omega t - \theta) + \omega_0^2 A \sin(\omega t - \theta) = f_0 \sin \omega t$$

$$A(\omega_0^2 - \omega^2) \sin(\omega t - \theta) + 2K \omega A \cos(\omega t - \theta) = f_0 \sin \omega t$$

$$A(\omega_0^2 - \omega^2) \sin(\omega t - \theta) + 2K \omega A \cos(\omega t - \theta) = f_0 \sin(\omega t - \theta + \theta)$$

$$\Rightarrow A(\omega_0^2 - \omega^2) \sin(\omega t - \theta) + 2K \omega A \cos(\omega t - \theta) =$$

$$f_0 \sin(\omega t - \theta) \cos \theta +$$

$$f_0 \cos(\omega t - \theta) \sin \theta$$

Equating the coefficients of $\sin(\omega t - \theta)$ and $\cos(\omega t - \theta)$

$$A(\omega_0^2 - \omega^2) = f_0 \cos \theta \text{ --- (2)}$$

$$2K \omega A = f_0 \sin \theta \text{ --- (3)}$$

Squaring and adding (2) and (3)

$$A^2(\omega_0^2 - \omega^2)^2 + 4K^2 \omega^2 A^2 = f_0^2 \cos^2 \theta + f_0^2 \sin^2 \theta$$

$$= f_0^2 (\cos^2 \theta + \sin^2 \theta)$$

$$= f_0^2$$

$$\Rightarrow f_0^2 = \lambda^2 (\omega_0^2 - p^2)^2 + 4k^2 \lambda^2 p^2$$


$$= \lambda^2 \{ (\omega_0^2 - p^2)^2 + 4k^2 p^2 \}$$

$$A^2 = \frac{f_0^2}{(\omega_0^2 - p^2)^2 + 4k^2 p^2}$$

$$A = \frac{\sqrt{f_0}}{\sqrt{(\omega_0^2 - p^2)^2 + 4k^2 p^2}} \quad \text{--- (2)}$$

$$\frac{(3)}{(2)} = \tan \theta = \frac{2kp}{A(\omega_0^2 - p^2)}$$

$$\tan \theta = \frac{2kp}{(\omega_0^2 - p^2)}$$

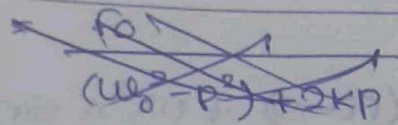

Substitute $A = \frac{f_0}{\sqrt{(\omega_0^2 - p^2)^2 + 4k^2 p^2}}$ in (1)

$$x = \frac{f_0}{\sqrt{(\omega_0^2 - p^2)^2 + 4k^2 p^2}} \sin(pt - \theta) \quad \text{--- (4)}$$

\therefore the complete solution becomes,

$$x = a_0 e^{-kt} \sin(\omega_0 t + \phi) + \frac{f_0}{\sqrt{(\omega_0^2 - p^2)^2 + 4k^2 p^2}} \sin(pt - \theta) \quad \text{--- (5)}$$

Initially both the vibrations will be present, but with the passage of time, first term vanishes and motion of the body will be completely represented by the second term.

$$x = \frac{f_0}{\sqrt{(\omega_0^2 - p^2)^2 + 4k^2 p^2}} \sin(pt - \theta) \quad \text{--- (6)}$$

AMPLITUDE RESONANCE

$$A = \frac{f_0}{\sqrt{(\omega_0^2 - p^2)^2 + 4k^2 p^2}}$$

KSU
GECI

$$\rightarrow (\omega_0^2 - p^2)^2 + 4k^2 p^2 = 0, \quad A = A_{\max}$$

$$\begin{aligned} \frac{d}{dp} [(\omega_0^2 - p^2)^2 + 4k^2 p^2] &= 2(\omega_0^2 - p^2) \frac{d}{dp} - p^2 + 4k^2 \cdot 2p = 0 \\ &= -4p(\omega_0^2 - p^2) + 8k^2 p = 0 \end{aligned}$$

$$4p[-(\omega_0^2 - p^2) + 2k^2] = 0$$

$$-\omega_0^2 + p^2 + 2k^2 = 0$$

$$p^2 = \omega_0^2 - 2k^2$$

$$p = \sqrt{\omega_0^2 - 2k^2}$$

$\Rightarrow P_R = p = \sqrt{\omega_0^2 - 2k^2}$, where P_R is resonance frequency.

$$A_{\max} = \frac{f_0}{\sqrt{(\omega_0^2 - P_R^2)^2 + 4k^2 P_R^2}}$$

$$\begin{aligned} P^2 &= \omega_0^2 - 2k^2 \\ 2k^2 &= \omega_0^2 - P^2 \end{aligned}$$

$$= \frac{f_0}{\sqrt{(2k^2)^2 + 4k^2 P_R^2}}$$

$$= \frac{f_0}{\sqrt{4k^4 + 4k^2 P_R^2}}$$

$$= \frac{f_0}{2k \sqrt{k^2 + P_R^2}}$$

At low damping k^2 can be neglected.

$$P_B = \sqrt{\omega_0^2 - 2k^2}$$


(i) $P_B^2 = \omega_0^2$

$$A_{max} = \frac{f_0}{2kP_R}$$

$\frac{1}{2k} = \tau = \text{relaxation time}$

$$= \frac{f_0}{2k\omega_0}$$

$$= \frac{f_0 \tau}{\omega_0}$$

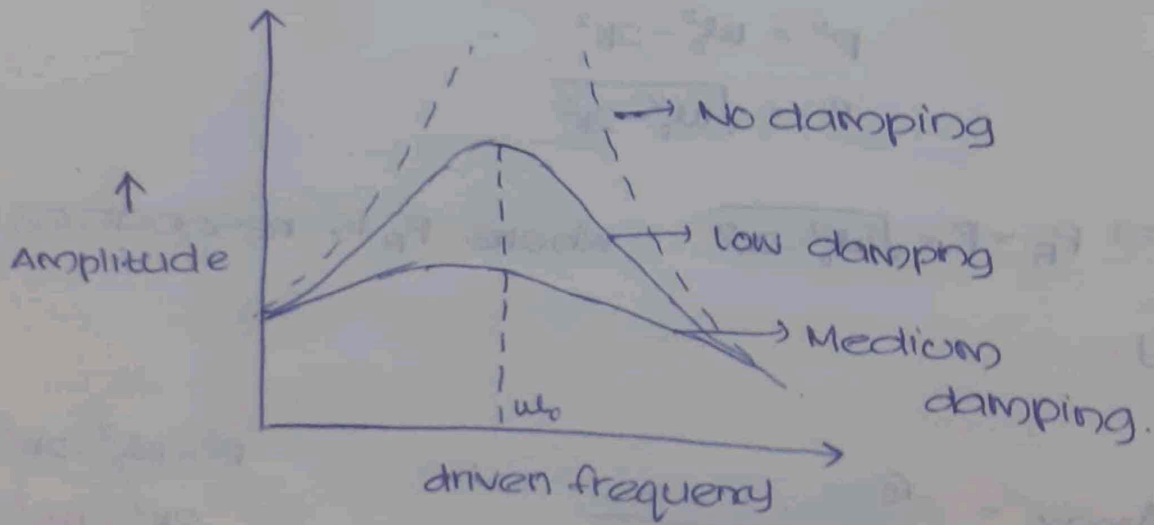

NOTE :-

When driven frequency is much less than ω_0

$$p \ll \omega_0$$

from — (2)

$$A = \frac{f_0}{\sqrt{(\omega_0^2 - p^2)^2 + 4k^2 p^2}}$$

then, $p \ll \omega_0$

p become neglected.

$$A = \frac{f_0}{\sqrt{(\omega_0^2)^2}}$$

$$= \frac{f_0}{\omega_0^2}$$

$$= \frac{F_0}{M\omega_0^2}$$

$$f_0 = \frac{F_0}{M}$$

$$C/M = \omega_0^2$$

$$C = M\omega_0^2$$

$$\underline{\underline{A = \frac{F_0}{C}}}$$

KSO

GECI

this shows that Amplitude is a constant.

(ii) $p \gg \omega_0$

$$A = \frac{f_0}{p^2}$$

$$= \frac{F_0}{Mp^2}$$

$$A = \frac{f_0}{\sqrt{(\omega_0^2 - p^2)^2 + 4k^2 p^2}}$$

here

k is very

small

hence it

become zero

QUALITY FACTOR

No. of rotation an oscillator can done before it coming to rest.

$$Q = \frac{A_{\max}}{A_{\text{at } p=0}}$$

Ratio of Amplitude at resonance to the Amplitude of zero driven frequency.

$$Q = \frac{f_0 / 2k u l_0}{f_0 / u l_0^2}$$

$$= \frac{1}{2k} u l$$

$$\underline{\underline{Q = \tau u l}}$$


$$Q = \frac{\sqrt{c/M}}{r/M} \Rightarrow \underline{\underline{\frac{\sqrt{cM}}{r}}}$$

SHARPNESS OF RESONANCE

The term sharpness of resonance refers to the rate of fall of amplitude with change in driven frequency on either side of the resonance frequency. We see that when damping is small, the amplitude falls off rapidly on either side of the resonance frequency. Then we say the resonance is sharp.

When damping is large, the amplitude falls off very slowly on either side of the resonance frequency, then we say the resonance is flat.

LCR CIRCUIT AS AN ELECTRICAL ANALOG OF MECHANICAL OSCILLATOR

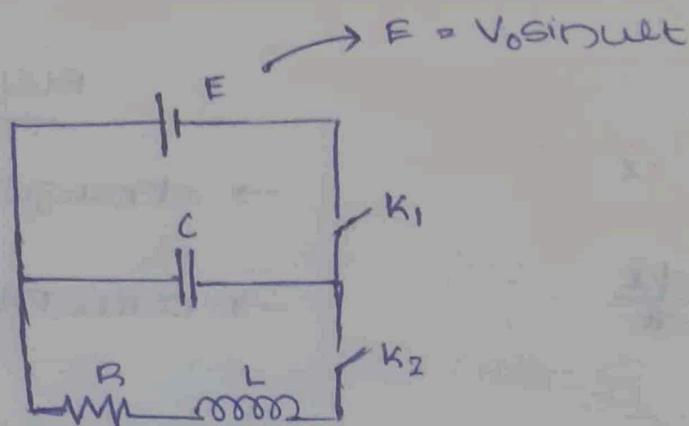

KSCU
GLECI

potential difference across inductor :-

$$V_L = L \frac{di}{dt}$$

$$i = \frac{dq}{dt}, q = \text{charge}$$

$$= L \frac{d^2q}{dt^2}$$

potential difference across resistor :-

$$V_R = iR = R \frac{dq}{dt}$$

potential difference across capacitor :-

$$V_C = \frac{q}{C}$$

$$\Rightarrow V_L + V_R + V_C = E$$

$$\text{ie, } V_0 \sin \omega t = V_L + V_R + V_C$$

$$V_0 \sin \omega t = L \frac{d^2 q}{dt^2} + R \frac{dq}{dt} + q/C$$

MECHANICAL

- displacement x
- velocity $v = \frac{dx}{dt}$
- Mass M
- Damping coefficient r
- Force constant k
- potential energy $\frac{1}{2} kx^2$

→ kinetic energy $\frac{1}{2} Mv^2$

→ Resonance frequency

$$\omega_0 = \frac{1}{2\pi} \sqrt{\frac{c}{M}}$$

ELECTRICAL

→ charge q

→ current $i = \frac{dq}{dt}$

→ inductance L

→ Resistance R

→ Reciprocal of capacitance

→ potential energy =
energy stored in capacitor
 $\frac{1}{2} C V^2$

→ $\frac{1}{2} L I^2$

→ $\frac{1}{2\pi} \sqrt{\frac{1}{LC}}$

WAVES

KSC
GECI

ONE DIMENSIONAL WAVE EQUATION;

wave function in +ve direction, $\psi(x,t) = f(x-vt)$ — (1)

-ve direction, $\psi(x,t) = f(x+vt)$ — (2)

$$\implies \underline{\underline{\psi(x,t) = f(x \pm vt)}}$$

Differential equation

differential eqn (1) with respect to x , twice.

$$\psi(x,t) = f(x-vt)$$

$$\frac{\partial \psi}{\partial x} = f'(x-vt)$$

$$\frac{\partial^2 \psi}{\partial x^2} = f''(x-vt) \text{ — (3)}$$

differentiate eqn (1) with respect to t , twice

$$\frac{\partial^2 \psi}{\partial t^2} = f''(x-vt) \times (-v)^2$$

$$\frac{\partial \psi}{\partial t} = f'(x-vt) \times -v$$

$$\frac{\partial^2 \psi}{\partial t^2} = v^2 f''(x-vt) \text{ — (4)}$$

$$\text{3) & 4) } \implies \underline{\underline{\frac{\partial^2 \psi}{\partial t^2} = v^2 \frac{\partial^2 \psi}{\partial x^2}}}$$

$$\frac{\partial^2 \psi}{\partial x^2} = \frac{1}{v^2} \frac{\partial^2 \psi}{\partial t^2}$$

This differential equation of a one dimensional wave.

Generally, solution of a wave is

$$\psi(x, t) = A \sin k(x - vt) \quad k \rightarrow \text{propagation constant}$$

DEFINITION OF WAVELENGTH AND PERIOD:-

$$\psi(x, t) = A \sin k(x - vt)$$

replace x with $x + \frac{2\pi}{k}$

$$\psi(x, t) = A \sin k \left(x + \frac{2\pi}{k} - vt \right)$$

$$= A \sin [kx + 2\pi - vt k]$$

$$= A \sin [k(x - vt) + 2\pi]$$

$$= A \sin [k(x - vt)]$$

$$\sin(\theta + 2\pi) = \sin \theta$$

This means $\psi(x, t)$ represents a periodic wave with its space periodicity $\frac{2\pi}{k}$, i.e. the wave has the same value of displacement at x and $x + \frac{2\pi}{k}$.

Again replace t with $t + \frac{2\pi}{kv}$

$$\psi(x, t) = A \sin k(x - vt)$$

$$\psi\left(x, t + \frac{2\pi}{kv}\right) = A \sin k\left(x - v\left(t + \frac{2\pi}{kv}\right)\right)$$

$$= A \sin [kx - kv t + 2\pi]$$

$$= A \sin (k[x - vt] + 2\pi)$$

$$= A \sin [k(x - vt)]$$

$$= \psi(x, t)$$

KSU
GECI

This means $\psi(x, t)$ represents a periodic wave with time periodicity $\frac{2\pi}{kv}$,

ie, this time interval after which the wave has the same value of displacement is known as period of wave.

$$T = \frac{2\pi}{kv} \quad \text{also } T = \frac{2\pi}{\omega}$$

$$\omega = kv$$

$$\frac{1}{T} = f$$

$$v = \frac{\omega}{2\pi}$$

$$2\pi v = \omega$$

$$\frac{2\pi}{kv} = T$$

$$\frac{2\pi}{T} = kv$$

$$\omega = kv$$

but $k = \frac{2\pi}{\lambda}$

$$\therefore 2\pi v = kv$$

$$2\pi v = \frac{2\pi}{\lambda} v$$

$$v = \frac{v}{\lambda}$$

$$\boxed{v = v\lambda}$$

DIFFERENTIAL EQUATION OF THREE DIMENSIONAL WAVE AND

IT'S SOLUTION

$$\psi = f(x, y, z, t)$$

$$\frac{\partial^2 \psi}{\partial x^2} + \frac{\partial^2 \psi}{\partial y^2} + \frac{\partial^2 \psi}{\partial z^2} = \frac{1}{v^2} \frac{\partial^2 \psi}{\partial t^2} \quad \left[v^2 = \frac{d^2}{dx^2} + \frac{d^2}{dy^2} + \frac{d^2}{dz^2} \right]$$

$$\nabla^2 \psi = \frac{1}{v^2} \frac{\partial^2 \psi}{\partial t^2}$$

∴ SOLUTION IS

$$\psi = ae^{\pm i(k \cdot r) \pm \omega t}$$

where k is propagation vector

r is direction vector


$$r = x\hat{i} + y\hat{j} + z\hat{k}$$

For waves travelling in the +ve x direction the above solution can be written as in terms of an or cosine functions.

$$\psi = a \sin(k \cdot r - \omega t)$$

$$\psi = a \cos(k \cdot r - \omega t)$$

TRANSVERSE VIBRATIONS OF A STRETCHED STRING

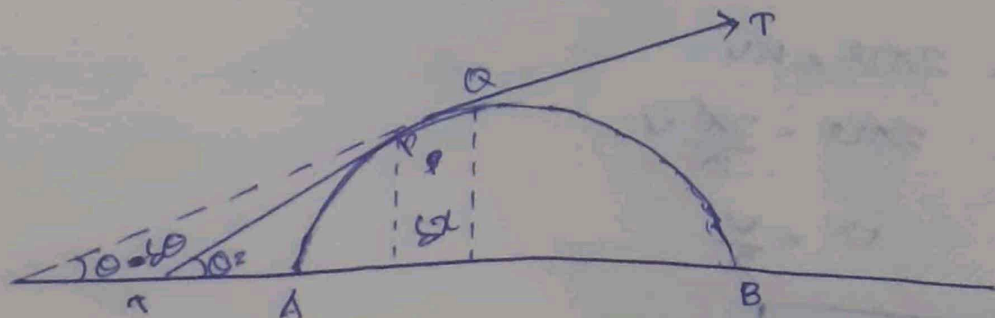

Consider a small element PQ of length δx , The
tangent at P and Q make $\angle \theta$ and $\angle (\theta - \delta \theta)$.

The downward component of tension at P = $T \sin \theta$;

$$\sin \theta = \frac{P}{T}$$

$$\therefore P = T \sin \theta$$

KSCU
GRECI

[When θ is small, $\sin \theta = \tan \theta$]

$\tan \theta = \text{slope}$

$$\Rightarrow P = T \tan \theta \quad \text{--- (1)}$$

$$= \frac{dy}{dx}$$

$$= T \frac{dy}{dx} \quad \text{--- (2)}$$

The rate of change of slope with respect to the
length of the element.

$$P = \frac{d}{dx} \left(\frac{dy}{dx} \right) = \frac{d^2y}{dx^2}$$

\therefore change in slope for a distance δx is

$$= \delta x \frac{dy}{dx}$$

\rightarrow slope at the point Q,

$$\tan (\theta - \delta \theta) = \frac{dy}{dx} - \delta x \frac{d^2y}{dx^2}$$

the upward component of tension at Q is \rightarrow

$$= T \sin(\theta - \delta\theta)$$

$$= T \tan(\theta - \delta\theta)$$

$$= T \left[\frac{dy}{dx} - \delta x \frac{d^2y}{dx^2} \right]$$

\therefore the resultant downward tension $F =$,

$$F = T \frac{dy}{dx} - T \left[\frac{dy}{dx} - \frac{d^2y}{dx^2} \delta x \right]$$

$$= T \frac{dy}{dx} - T \frac{dy}{dx} + T \frac{d^2y}{dx^2} \delta x$$

$$= T \frac{d^2y}{dx^2} \delta x \quad \text{--- (A)}$$

let m be the mass of the unit length of the string

$$\text{mass of the element} = m \delta x$$

the force acting on the element = mass \times acceleration

$$F = m \delta x \times \frac{d^2y}{dt^2} \quad \text{--- (5)}$$

$$(A) \& (5) \Rightarrow T \frac{d^2y}{dx^2} \delta x = m \delta x \frac{d^2y}{dt^2}$$

$$m \frac{d^2y}{dt^2} = T \frac{d^2y}{dx^2}$$

$$\frac{d^2y}{dt^2} = \frac{T}{m} \frac{d^2y}{dx^2} \quad \text{--- (6)}$$

this is similar to one dimensional wave equation

$$\frac{d^2\psi}{dt^2} = v^2 \frac{d^2\psi}{dx^2} \quad \text{--- (6)}$$

$$(6) \text{ and } (7) \implies v^2 = \frac{T}{M}$$

$$v = \sqrt{\frac{T}{M}}$$

v - velocity of propagation of wave.

If ν is the fundamental frequency of vibration of the string.

$$v = \nu \lambda$$

$$\sqrt{\frac{T}{M}} = \nu \lambda$$

$$\boxed{\nu = \frac{1}{\lambda} \sqrt{\frac{T}{M}}}$$

KSCU

GECI

In the case of string of length l vibrating in one segment.

$$l = \frac{\lambda}{2}$$

$$\lambda = 2l$$

$$\implies \nu = \frac{1}{2l} \sqrt{\frac{T}{M}}$$

LAWS OF TRANSVERSE VIBRATIONS

1. LAW OF LENGTH :-

The fundamental frequency of vibration is

Inversely proportional to the resonating length of the string.

2. LAW OF TENSION

The fundamental frequency of vibration is directly proportional to the square root of the tension of string.

3. LAW OF MASS.

The fundamental frequency of vibration is inversely proportional to the square root of the mass per length of string.

KSU

CECI